Diehard Pump 4100, 5100, and 6100 SERIES


DISTRIBUTED BY



Diehard PUMP INNOVATIONS

All series of pumps are typically 50 percent faster than competition units (based on size)

Pump Comparison

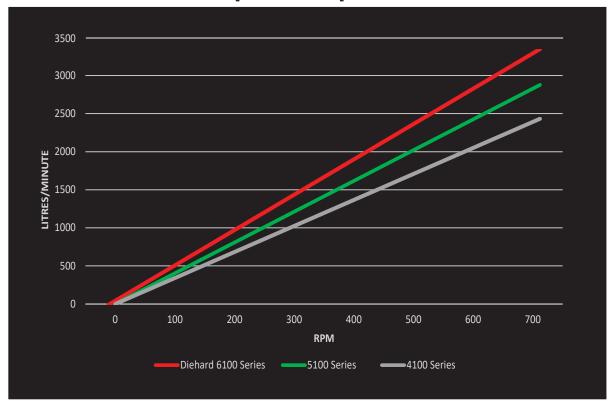

Diehard 6100 Series	3300 Litres/min	3.3 m ³ /m
Diehard 5100 Series	2797 Litres/min	2.8 m ³ /m
Diehard 4100 Series	2400 Litres/min	2.4m ³ /m

FEATURES:

- Faster pump on/off time
- Hardened gears, shaft, housing for extended life
- Triple seal
- Oil bath & greaseable version provides ease of maintenance
- Purchase/lease to purchase options

SPECIFICATIONS

Diehard 4100, 5100, and 6100 Series		
Drive Configuration	Drive on Top & Bottom	
Port Configuration	180 Degree	
Housing	Nitrided	
End Plates	Nitrided	
Wear Plates	Nitrided	
Gears	Hardened Steel	
Bushings	Bronze	
Bearings	High Load Capacity	
Packing	Both	
Lip Seals	Viton [®]	
Mechanical Seals	N/A	
Shafts	1-3/8" Nitrided Steel	
Port Size	4.5", 5", 6"	
Lubrication	Grease/oil	

"This is the fastest pump I've had to date in the field." — Tony S.

"After installing the DieHard pump I am averaging 2 - 3 loads extra per day of in-field hauling." — Andrew Y.

"I am a long-haul fluid hauler and the DieHard pump is saving me about an hour a day. Best pump I've ever owned." — Jim T.











Site 10A, Reinhart Industrial Park Lloydminster, Alberta paul@diehardpump.com www.diehardpump.com (780) 875-1718